






ADVANCE SERIES



PM 0.1 FILTER

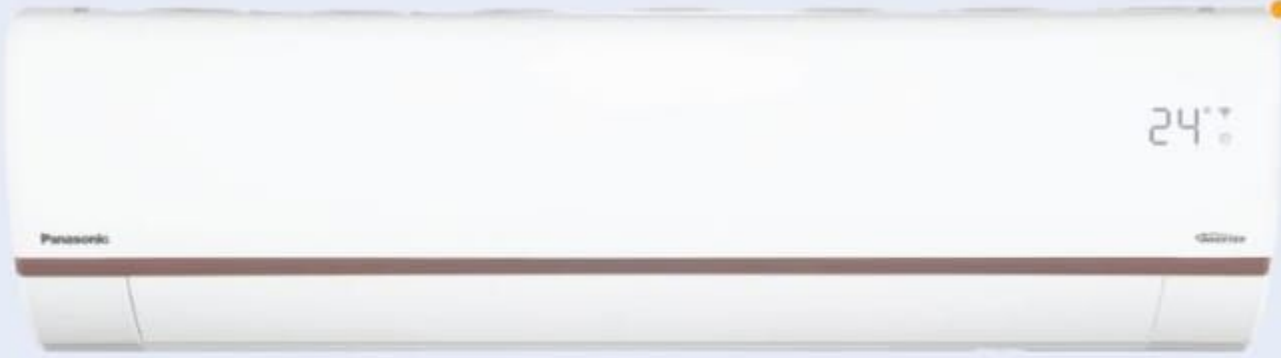

SPECIFICATIONS

Model		[50Hz]	CS/CU-AU12AKYF	CS/CU-AU18AKYF/FA	CS/CU-AU24AKYF
			Cooling Only	Cooling Only	Cooling Only
Type		-			
Tonnage Class		TR	1.0	1.5	2.0
Cooling Capacity Standard [Min. - Max.]		Btu/h W	11772 [5306 - 12966] 3450 [1555 - 3800]	17400 [7831 - 19142] 5100 [2295 - 5610]	21496 [9673-23646] 6300 [2835-6930]
Heating Capacity Standard [Min. - Max.]		Btu/h W	- -	- -	- -
ISEER		-	3.95	3.95	3.95
Annual Power Consumption		kWh	676.37	1000.53	1234.16
Star Rating		★	3	3	3
Electrical Data	Voltage	V-AC	230	230	230
	Phase	Φ	Single Phase	Single Phase	Single Phase
	Running Current	A	5.0	7.7	9.6
	Power Input, Standard Cooling [Min. - Max.]	W	1095 [369 - 1478]	1690 [527 - 2282]	2090 [648 - 2821]
	Power Input, Standard Heating [Min. - Max.]	W	-	-	-
Moisture Removal Rate	l/h		1.0	1.2	2.3
	Pt/h		2.1	2.5	4.8
Air Circulation (Indoor/Hi)	m ³ /min		13.5	18.0	18.5
	ft ³ /min		477	636	653
Net Dimensions IDU	Length (L)	cm	87.0	107.0	107.0
	Breadth (B)	cm	23.6	24.1	24.1
	Height (H)	cm	29.6	29.6	29.6
Net Dimensions ODU	Length (L)	cm	78.0	78.0	82.4
	Breadth (B)	cm	28.8	28.8	29.9
	Height (H)	cm	54.2	54.2	61.9
Noise Level	Indoor (H/L)	[dB-A]	43/36	47/38	50/39
	Outdoor	[dB-A]	53	53	56
Net Weight IDU [ODU]		kg	10 [23]	12 [23]	12 [30]
		lb	22 [51]	26.5 [50.7]	26.5 [66]
Gross Weight IDU [ODU]		kg	11 [27]	14 [27]	14 [35]
		lb	24.2 [59.5]	31 [59.5]	31 [78]
Refrigerant		-	R-32	R-32	R-32
Operating Temp. Range		°C	16 - 52	16 - 52	16 - 52
Operating Volt. Range		V	145-285	145-285	145-285
Refrigerant Pipe Diameter	Liquid Side	cm	Ø0.635	Ø0.635	Ø0.635
	Gas Side	cm	Ø0.952	Ø1.270	Ø1.270
Pipe Extension	Chargeless Pipe Length	m	7.5	7.5	7.5
	Maximum Pipe Length	m	10	15	15
	Maximum Elevation Length	m	5	10	10
	Additional Refrigerant Gas*	g/m	10	15	20
Power Supply Source		-	Indoor	Indoor	Indoor

WARRANTY



OUTDOOR

